

GS2 Series – Introduction

GS2 Series Drives									
Motor Rating	hp	0.25	0.5	1	2	3	5	7.5	10
	kW	0.2	0.4	0.75	1.5	2.2	3.7	5.5	7.5
230V Single-Phase Input / 230V Three-Phase Output			✓	✓	✓	✓			
230V Three-Phase Input / Output			✓	✓	✓	✓	✓	✓	
460V Three-Phase Input / Output				✓	✓	✓	✓	✓	✓
575V Three-Phase Input / Output				✓	✓	✓	✓	✓	✓



Overview

The GS2 series of AC drives offers all of the features of our GS1 drive plus dynamic braking, PID and a removable keypad. The drive can be configured using the built-in digital keypad or with the standard RS-232/RS-485 serial communications port. The standard keypad allows you to configure the drive, set the speed, start and stop the drive, command forward and reverse direction of motor shaft, and monitor specific parameters during operation. Each GS2 features one analog and six programmable digital inputs, and one analog and two programmable relay outputs.

Features

- Simple Volts/Hz control
- Sinusoidal Pulse Width Modulation (PWM)
- 1-12 kHz carrier frequency
- IGBT technology
- Starting torque: 125% at 0.5 Hz/150% at 5 Hz
- 150% rated current for one minute
- Electronic overload protection
- Stall prevention
- Adjustable accel and decel ramps
- S-curve settings for acceleration and deceleration
- Automatic torque compensation
- Automatic slip compensation
- Dynamic braking circuit
- DC braking
- Three skip frequencies
- Trip history
- Programmable jog speed
- Integral PID control
- Removable keypad with speed potentiometer
- Programmable analog input
- Programmable analog output
- Six programmable digital inputs
- Two programmable relay outputs
- RS-232/485 Modbus communications up to 38.4 Kbps.
- Optional Ethernet communications
- Two-year warranty
- UL/cUL/CE* listed
- * GS2-5xxx 575V drives NOT CE compliant

Accessories

- AC line reactors
- EMI filters
- RF filter
- Braking resistors
- Fuse kits and replacement fuses
- DIN rail mounting adapter (see "Accessories" table for applicability)
- Replacement keypads
- Keypad cables in 1, 3, and 5-meter lengths
- Ethernet interface
- Four and eight-port serial communication breakout boards
- GSoft drive configuration software
- USB-485M – USB to RS-485 PC adapter (see "Communications Products" chapter for detailed information)
- Serial communication cables available for creating plug and play RS-232/RS-485 networks with AutomationDirect PLCs. See the comm cable matrix on page [tGSX-162](#)
- **Detailed descriptions and specifications for GS accessories are available in the "GS/DURAPulse Accessories" section.**

Typical Applications

- Conveyors
- Fans
- Pumps
- Compressors
- HVAC
- Material handling
- Mixing
- Shop tools

GS2 Series Specifications

230V CLASS GS2 SERIES					
Model		GS2-22P0	GS2-23P0	GS2-25P0	GS2-27P5
Price		<--->	<--->	<--->	<--->
Motor Rating	HP	2hp	3hp	5hp	7.5hp
	kW	1.5kW	2.2kW	3.7kW	5.5kW
Rated Output Capacity (kVA)		2.7	3.8	6.5	9.5
Rated Input Voltage		Single/Three-phase : 200/208/220/230/240 VAC ±10%; 50/60Hz ±5%		Three-phase : 200/208/220/230/240 VAC ±10%; 50/60 Hz ±5%	
Rated Output Voltage		Three-phase : Corresponds to input voltage			
Rated Input Current (A)		15.7/8.8	27.0/12.5	19.6	28
Rated Output Current (A)		7.0	10	17	25
DC Braking		Frequency 60–0 Hz, 0–100% rated current, start time 0.0–5.0 seconds, Stop Time 0.0–25.0 seconds			
Watt Loss @ 100% I (W)		77	111	185	255
Weight (lb)		3.7	8.5	8.5	8.5
Dimensions* (HxWxD) (mm [in])		220.0 x 125.0 x 189.5 [8.66 x 4.92 x 7.46]			
Accessories					
Line Reactor	Single-Phase	LR-22P0-1PH	LR-23P0-1PH	n/a	n/a
	Three-Phase	LR-22P0	LR-23P0	LR-25P0	LR-27P5
Braking Resistor		GS-22P0-BR	GS-23P0-BR	GS-25P0-BR	GS-27P5-BR
EMI Filter (single phase input)		20DRT1W3S	32DRT1W3C	40TDS4W4B	
RF Filter		RF220X00A			
Fuse Kit	Single-Phase	GS-22P0-FKIT-1P	GS-23P0-FKIT-1P	N/A	N/A
	Three-Phase	GS-22P0-FKIT-3P	GS-23P0-FKIT-3P	GS-25P0-FKIT-3P	GS-27P5-FKIT
Replacement Fuses	Single-Phase	GS-22P0-FUSE-1P	GS-23P0-FUSE-1P	N/A	N/A
	Three-Phase	GS-22P0-FUSE-3P	GS-23P0-FUSE-3P	GS-25P0-FUSE	GS-27P5-FUSE
DIN Rail Mounting Adapter		GS2-DR02	n/a		
Spare Keypad, GS2 Series Drive		GS2-KPD			
Keypad Cable, GS2 Series, 1 meter		GS-CBL2-1L			
Keypad Cable, GS2 Series, 3 meter		GS-CBL2-3L			
Keypad Cable, GS2 Series, 5 meter		GS-CBL2-5L			
Ethernet Communications module for GS Series Drives (DIN rail mounted)		GS-EDRV100			
USB to RS232 PC Communication Adapter		USB-RS232			
RS-232 Serial Cable, GS2 Drive to DL05/06, CLICK, D2-250/260, D4-450, P3-550		GS-RJ12-CBL-2			
USB to RS-485 PC Communication Adapter		USB-485M			
RS-485 Communication Distribution Module (for creating plug and play RS-485 networks)		ZL-CDM-RJ12X4 / ZL-CDM-RJ12X10			
RS-485 Serial Cable, GS Drive to DL06/D2-260		GS-485HD15-CBL-2			
RS-485 Serial Cable, GS Drive to ZIPLink CDM Module		GS-485RJ12-CBL-2			
Software		GSoft			
*Note: Height dimension does not include external ground terminal, which adds 10 to 15 mm. Refer to dimensional drawings for details.					

GS2 Series Specifications

460V CLASS GS2 SERIES							
Model	GS2-41P0	GS2-42P0	GS2-43P0	GS2-45P0	GS2-47P5	GS2-4010	
Price	<--->	<--->	<--->	<--->	<--->	<--->	
Motor Rating	HP	1hp	2hp	3hp	5hp	7.5hp	10hp
	kW	0.8kW	1.5kW	2.2kW	4kW	5.5kW	7.5kW
Rated Output Capacity (kVA)	2.3	3.1	3.8	6.2	9.9	13.7	
Rated Input Voltage	Three-phase: 380/400/415/440/460/480 VAC $\pm 10\%$; 50/60 Hz $\pm 5\%$						
Rated Output Voltage	Corresponds to input voltage						
Rated Input Current (A)	4.2	5.7	6.0	8.5	14	23	
Rated Output Current (A)	3.0	4.0	5.0	8.2	13	18	
DC Braking	Frequency 60–0 Hz, 0–100% rated current, Start Time 0.0–5.0 seconds, Stop Time 0.0–25.0 seconds						
Watt Loss @ 100% I (W)	73	86	102	170	240	255	
Weight (lb)	3.5	3.6	3.7	8.5	8.5	8.5	
Dimensions* (HxWxD) (mm [in])	151.0 x 100.0 x 140.5 [5.94 x 3.94 x 5.53]			220.0 x 125.0 x 189.5 [8.66 x 4.92 x 7.46]			
Accessories							
Line Reactor	LR-41P0	LR-42P0	LR-43P0	LR-45P0	LR-47P5	LR-4010	
Braking Resistor	GS-41P0-BR	GS-42P0-BR	GS-43P0-BR	GS-45P0-BR	GS-47P5-BR	GS-4010-BR	
EMI Filter	11TDT1W4S			17TDT1W44		26TDT1W4B4	
RF Filter	RF220X00A						
Fuse Kit	GS-41P0-FKIT	GS-42P0-FKIT	GS-43P0-FKIT	GS-45P0-FKIT	GS-47P5-FKIT	GS-4010-FKIT	
Replacement Fuses	GS-41P0-FUSE	GS-42P0-FUSE	GS-43P0-FUSE	GS-45P0-FUSE	GS-47P5-FUSE	GS-4010-FUSE	
DIN Rail Mounting Adapter	GS2-DR02			n/a			
Spare Keypad, GS2 Series Microdrive	GS2-KPD						
Keypad Cable, GS2 Series, 1 meter	GS-CBL2-1L						
Keypad Cable, GS2 Series, 3 meter	GS-CBL2-3L						
Keypad Cable, GS2 Series, 5 meter	GS-CBL2-5L						
Ethernet Communications Module for GS Series Drives (DIN rail mounted)	GS-EDRV100						
USB to RS232 PC Communication Adapter	USB-RS232						
RS-232 Serial Cable, GS2 Drive to DL05/06, CLICK, D2-250/260, D4-450, P3-550	GS-RJ12-CBL-2						
USB to RS-485 PC Communication Adapter	USB-485M						
RS-485 Communication Distribution Module (for creating plug and play RS-485 networks)	ZL-CDM-RJ12X4 / ZL-CDM-RJ12X10						
RS-485 Serial Cable, GS Drive to DL06/D2-260	GS-485HD15-CBL-2						
RS-485 Serial Cable, GS Drive to ZIPLink CDM Module	GS-485RJ12-CBL-2						
Software	GSoft						
*Note: Height dimension does not include external ground terminal, which adds 10 to 15 mm. Refer to dimensional drawings for details.							

GS2 Series Specifications

575V CLASS GS2 SERIES					
Model	GS2-51P0	GS2-53P0	GS2-57P5	GS2-5010	
Price	<--->	<--->	<--->	<--->	
Motor Rating	HP	1hp	3hp	7.5hp	10hp
	kW	0.75kW	2.2kW	5.5kW	7.5kW
Rated Output Capacity (kVA)	1.7	4.2	9.9	12.2	
Rated Input Voltage	Three-phase: 500 to 600 VAC -15/+10%; 50/60 Hz ±5%				
Rated Output Voltage	Corresponds to input voltage				
Rated Input Current (A)	2.4	5.9	10.5	12.9	
Rated Output Current (A)	1.7	4.2	9.9	12.2	
DC Braking	Frequency 60-0 Hz, 0-100% rated current, Start Time 0.0-5.0 seconds, Stop Time 0.0-25.0 seconds				
Watt Loss @ 100% I (W)	30	83	191	211	
Weight (lb)	3.3	4.4	7.0	7.3	
Dimensions* (HxWxD) (mm [in])	151.0 x 100.0 x 140.5 [5.94 x 3.94 x 5.53]				
Accessories					
Line Reactor	LR-51P0	LR-53P0	LR-5010		
Braking Resistor	GS-42P0-BR	GS-42P0-BR x (2) in parallel		GS-4010-BR x (2) in series	
EMI Filter	not available				
RF Filter	RF220X00A				
Fuse Block (Edison 3-pole part #)	BC6033PQ or CHCC3D or CHCC3DI				
Replacement Fuses (Edison Fuse part #)	HCLR6 (10 fuses per pack)	HCLR15 (10 fuses per pack)	HCLR20 (10 fuses per pack)	HCLR30 (10 fuses per pack)	
DIN Rail Mounting Adapter	GS2-DR02				
Spare Keypad, GS2 Series Microdrive	GS2-KPD				
Keypad Cable, GS2 Series, 1 meter	GS-CBL2-1L				
Keypad Cable, GS2 Series, 3 meter	GS-CBL2-3L				
Keypad Cable, GS2 Series, 5 meter	GS-CBL2-5L				
Ethernet Communications Module for GS Series Drives (DIN rail mounted)	GS-EDRV100				
USB to RS232 PC Communication Adapter	USB-RS232				
RS-232 Serial Cable, GS2 Drive to DL05/06, CLICK, D2-250/260, D4-450, P3-550	GS-RJ12-CBL-2				
USB to RS-485 PC Communication Adapter	USB-485M				
RS-485 Communication Distribution Module (for creating plug and play RS-485 networks)	ZL-CDM-RJ12X4 / ZL-CDM-RJ12X10				
RS-485 Serial Cable, GS Drive to DL06/D2-260	GS-485HD15-CBL-2				
RS-485 Serial Cable, GS Drive to ZIPLink CDM Module	GS-485RJ12-CBL-2				
Software	GSoft				
*Note: Height dimension does not include external ground terminal, which adds 10 to 15 mm. Refer to dimensional drawings for details.					

GS2 Series – General Specifications

General Specifications			
Control Characteristics			
Control System		Sinusoidal Pulse Width Modulation, carrier frequency 1kHz–12kHz	
Output Frequency Resolution		0.1 Hz	
Overload Capacity		150% of rated current for 1 minute	
Torque Characteristics		Includes auto-torque boost, auto-slip compensation, starting torque 125% @ 0.5Hz/150% @ 5.0Hz	
Braking Torque		20% without dynamic braking resistor, 125% with optional braking resistor	
DC Braking		Operation frequency 60–0 Hz, 0–100% rated current. Start time 0.0–5.0 seconds. Stop time 0.0–0.25.0 seconds	
Acceleration/Deceleration Time		0.1 to 600 seconds (linear or non-linear acceleration/deceleration), second acceleration/deceleration available	
Voltage/Frequency Pattern		V/F pattern adjustable. Settings available for Constant Torque - low and high starting torque, Variable Torque - low and high starting torque, and user configured	
Stall Prevention Level		20 to 200% or rated current	
Operation Specifications			
Inputs	Frequency Setting	Keypad	Setting by <UP> or <DOWN> buttons or potentiometer
		External Signal	Potentiometer - 3k to 5k Ω /2W, 0 to 10VDC (input impedance 10k Ω), 0 to 20mA / 4 to 20 mA (input impedance 250 Ω), Multi-speed inputs 1 to 3, Serial Communication RS232 and RS485 (Modbus RTU)
	Operation Setting	Keypad	Setting by <RUN>, <STOP> buttons
		External Signal	Forward/Stop, Reverse/Stop (run/stop, fwd/rev), 3-wire control, Serial Communication RS232 and RS485 (Modbus RTU)
	Input Terminals	Digital	6 user-programmable: FWD/STOP, REV/STOP, RUN/STOP, REV/FWD, Run momentary (N.O.), STOP momentary (N.C.), External Fault (N.O./N.C.), External Reset, Multi-Speed Bit (1-3), Jog, External Base Block (N.O./N.C.), Second Accel/Decel Time, Speed Hold, Increase Speed, Decrease Speed, Reset Speed to Zero, PID Disable (N.O.), PID Disable (N.C.), Input Disable
		Analog	1 user-configurable, 0 to 10VDC (input impedance 10k Ω) or 0 to 20mA / 4 to 20mA (input impedance 250 Ω), 10 bit resolution Frequency setpoint or PID process variable PV
Outputs	Output Terminals	Digital	2 user-programmable; Inverter Running, Inverter Fault, At Speed, Zero Speed, Above Desired Frequency, Below Desired Frequency, At Maximum Speed, Over Torque Detected, Above Desired Current, Below Desired Current, PID Deviation Alarm
		Analog	1 user-programmable: 0 to 10VDC (max load 2mA), 8 bit resolution frequency, current, process variable PV
	Operating Functions		Automatic voltage regulation, voltage/frequency characteristics selection, non-linear acceleration/ deceleration, upper and lower frequency limiters, 7-stage speed operation, adjustable carrier frequency (1 to 12 kHz), PID control, skip frequencies, analog gain & bias adjustment, jog, electronic thermal relay, automatic torque boost, trip history, software protection
Protective Functions			
Electronic Thermal, Overload Relay, Auto Restart after Fault, Momentary Power Loss, Reverse Operation Inhibit, Auto Voltage Regulation, Over-Voltage Trip Prevention, Auto Adjustable Accel/Decel, Over-Torque Detection Mode, Over-Torque Detection Level, Over-Torque Detection Time, Over-Current Stall Prevention during Acceleration, Over-Current Stall Prevention during Operation			
Operator Interface	Operator Devices		8-key, 4-digit, 7-segment LED, 14 status LEDs, potentiometer
	Programming		Parameter values for setup and review, fault codes
	Status Display		Actual Operating Frequency, RPM, Scaled Frequency, Amps, % Load, Output Voltage, DC Bus Voltage, Process Variable, Set-point Frequency
	Key Functions		RUN, STOP/RESET, FWD/REV, PROGRAM, DISPLAY, <UP>, <DOWN>, ENTER
Environment	Enclosure Rating		Protected chassis, IP20
	Ambient Temperature		-10° to 50°C (14°F to 122°F) -10° to 40°C (14°F to 104°F) For models 7.5 hp (5.5 kW) and higher
	Storage Temperature		-20° to 60 °C (-4°F to 140°F) - during short-term transportation period
	Ambient Humidity		20 to 90% RH (non-condensing)
	Vibration		9.8 m/s ² (1G), less than 10Hz; 5.9 m/s ² (0.6G) 10 to 60 Hz
	Installation Location		Altitude 1000m or lower above sea level, keep from corrosive gas, liquid and dust
Options			
Noise filter, input AC reactor, output AC reactor, cable for remote operator, programming software (GSOFT), Dynamic braking resistor, input fuses, ethernet interface (GS-EDRV100), EMI filters			

GS2 Specifications – Installation


Understanding the installation requirements for your GS2 drive will help to ensure that it operates within its environmental and electrical limits.

Note: Never use only this catalog for installation instructions or operation of equipment; refer to the user manual, GS2-M.


Environmental Specifications	
Protective Structure ¹	IP20
Ambient Operating Temperature ²	-10 to 50°C (14°F to 122°F) -10 to 40°C (14°F to 104°F) for models 7.5HP and higher
Storage Temperature ³	-20 to 60°C (-4°F to 140°F)
Humidity	To 90% (no condensation)
Vibration ⁴	5.9 m/s ² (0.6g), 10 to 55 Hz
Location	Altitude 1,000 m or less, indoors (no corrosive gases or dust)

- 1: Protective structure is based upon EN60529
- 2: The ambient temperature must be in the range of -10° to 40° C. If the range will be up to 50° C, you will need to set the carrier frequency to 2.1 kHz or less and derate the output current to 80% or less. See our Web site for derating curves.
- 3: The storage temperature refers to the short-term temperature during transport.
- 4: Conforms to the test method specified in JIS C0911 (1984)

Watt-loss Chart	
GS2 Drive Model	At full load
GS2-22P0	77
GS2-23P0	111
GS2-25P0	185
GS2-27P5	255
GS2-41P0	73
GS2-42P0	86
GS2-43P0	102
GS2-45P0	170
GS2-47P5	240
GS2-4010	255
GS2-51P0	30
GS2-53P0	83
GS2-57P5	191
GS2-5010	211

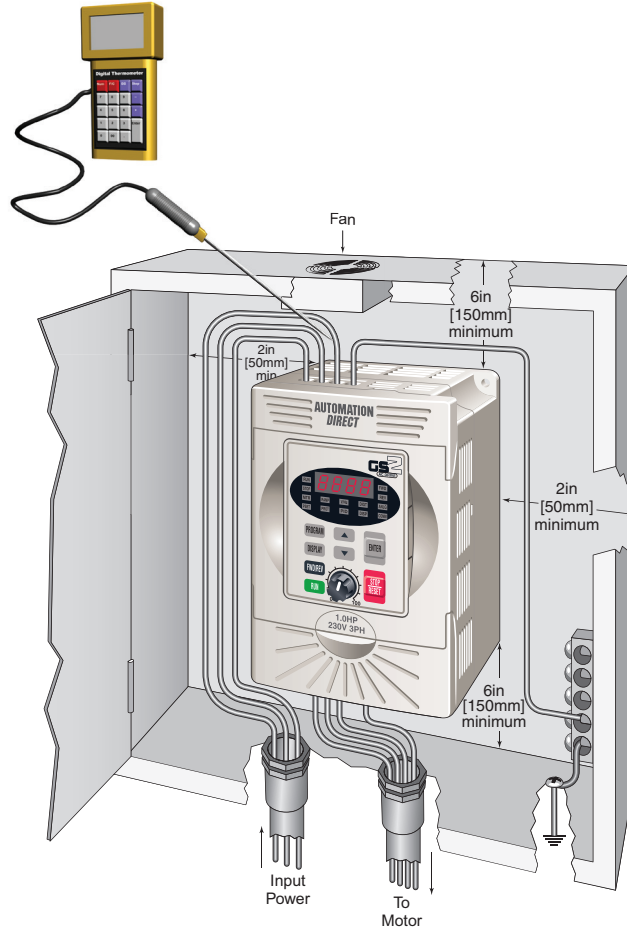

WARNING: MAXIMUM AMBIENT TEMPERATURES MUST NOT EXCEED 50°C (122°F), OR 40°C (104°F) FOR MODELS 7.5 HP (5.5 KW) AND HIGHER!

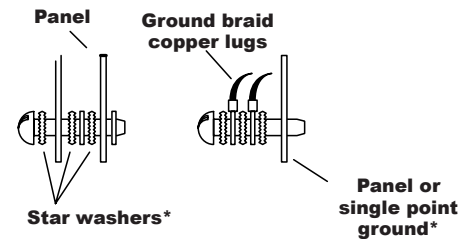



*** FOR PAINTED SUB-PANELS, SCRAPE THE PAINT FROM UNDERNEATH THE STAR WASHERS BEFORE TIGHTENING THEM.**



WARNING: AC DRIVES GENERATE A LARGE AMOUNT OF HEAT WHICH MAY DAMAGE THE AC DRIVE. AUXILIARY COOLING METHODS ARE TYPICALLY REQUIRED IN ORDER NOT TO EXCEED MAXIMUM AMBIENT TEMPERATURES.

GS2 Specifications – Terminals

Main Circuit Wiring	
Terminal	Description
L1, L2, L3	Input power
T1, T2, T3	AC drive output
B1, B2	DB resistor input
⏏	Ground

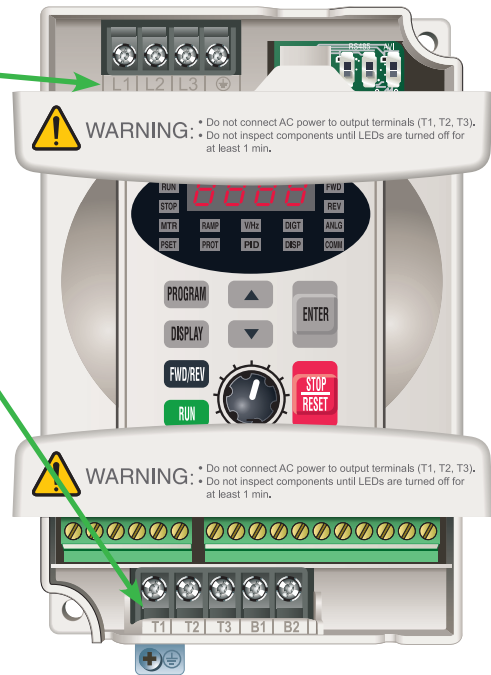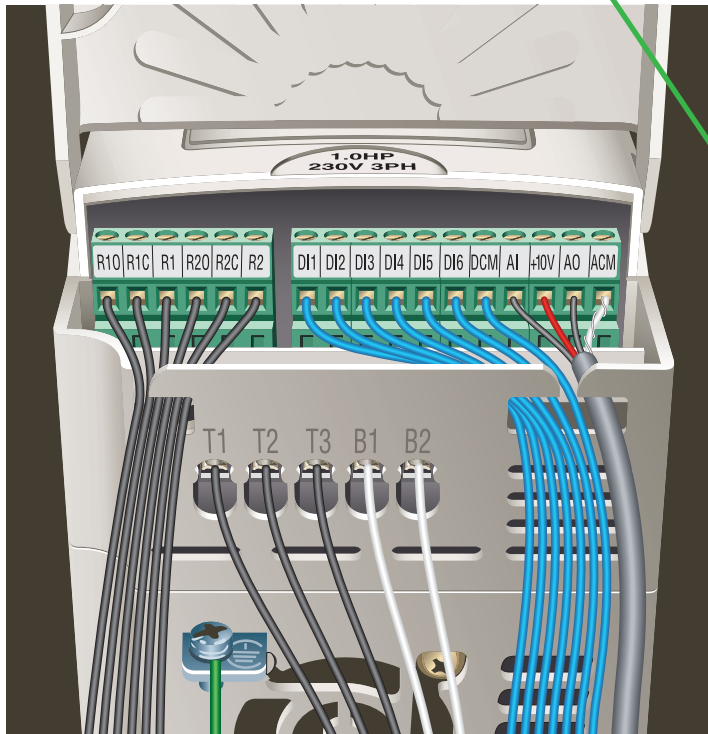


Control Circuit Terminals	
Terminal Symbol	Description
R10	Relay output 1 normally open
R1C	Relay output 1 normally closed
R1	Relay output 1 common
R20	Relay output 2 normally open
R2C	Relay output 2 normally closed
R2	Relay output 2 common
DI1	Digital input 1
DI2	Digital input 2
DI3	Digital input 3
DI4	Digital input 4
DI5	Digital input 5
DI6	Digital input 6
DCM	Digital common
AI	Analog input
+10V	Internal power supply (DC 10V) @ 10 mA
AO	Analog output
ACM	Analog common

Note: Use twisted-shielded, twisted-pair or shielded-lead wires for the control signal wiring. It is recommended to run all signal wiring in a separate steel conduit. The shield wire should only be connected at the drive. Do not connect shield wire on both ends.

GS2 Specifications – Basic Wiring Diagram

Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS2-M for additional specific wiring information.)

Note: Please refer to the following pages for explanations and information regarding line reactors (pg.tGSX-110), braking resistors (pg.tGSX-129), EMI filters (pg.tGSX-141), RF filters (pg.tGSX-150), and fuses (pg.tGSX-151).

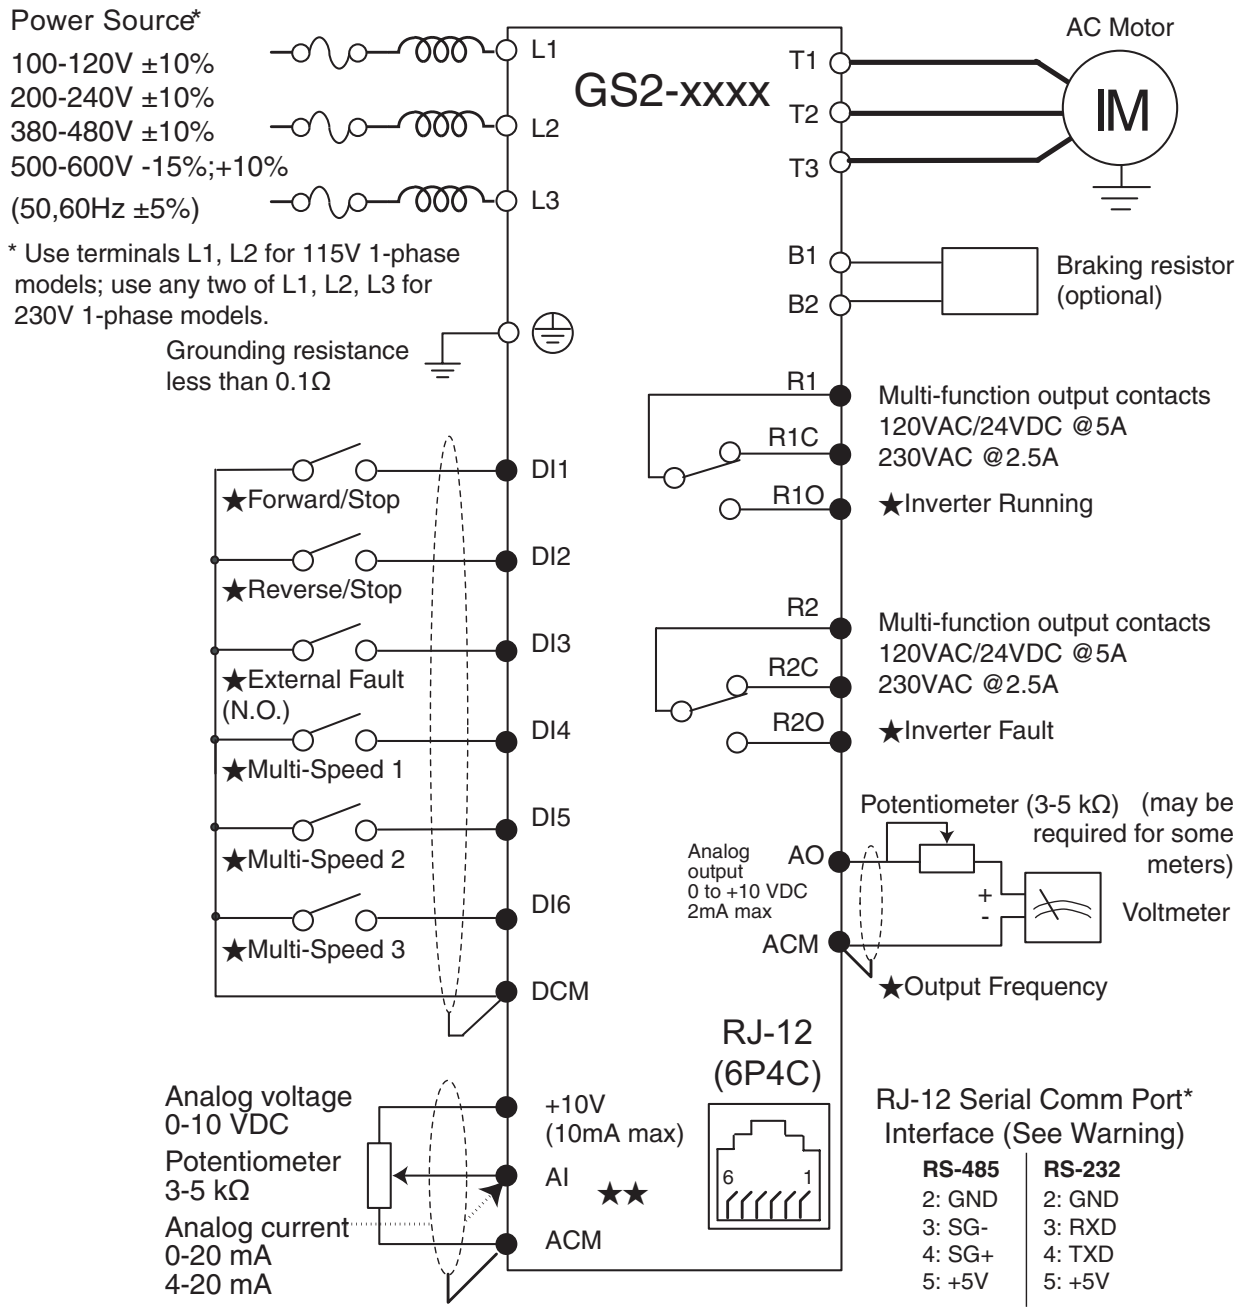

- ★ Factory default setting
- ★★ Factory default source of frequency command is via the keypad potentiometer
- Main circuit (power) terminals ● Control circuit terminal ⊕ Shielded leads


*Optional ZIPLink serial communication cables available for plug and play connectivity to AutomationDirect PLCs. See the comm cable selection matrix on page pg.tGSX-1.




WARNING: DO NOT PLUG A MODEM OR TELEPHONE INTO THE GS2 RJ-12 SERIAL COMM PORT, OR PERMANENT DAMAGE MAY RESULT. TERMINALS 2 AND 5 SHOULD NOT BE USED AS A POWER SOURCE FOR YOUR COMMUNICATION CONNECTION.

GS2 Specifications – Dimensions

**GS2-22P0; GS2-41P0, GS2-42P0,
GS2-43P0; GS2-51P0, GS2-53P0**

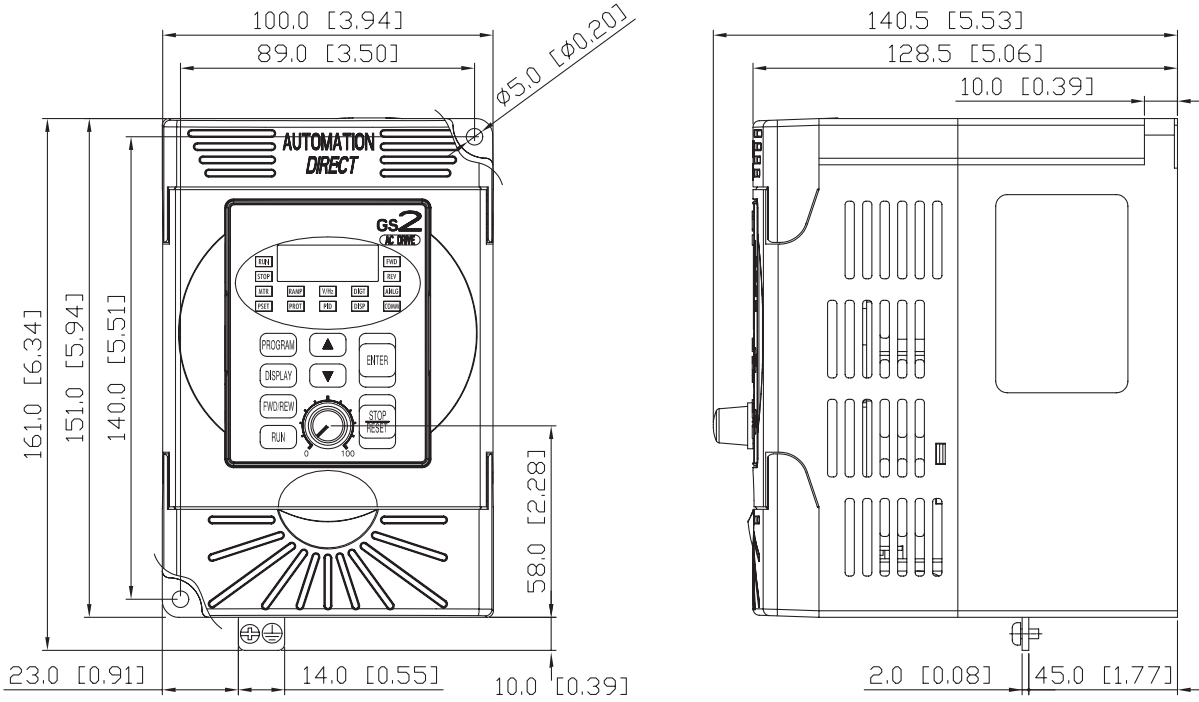

**GS2-23P0, GS2-25P0, GS2-27P5; GS2-45P0,
GS2-47P5, GS2-4010; GS2-57P5, GS2-5010**

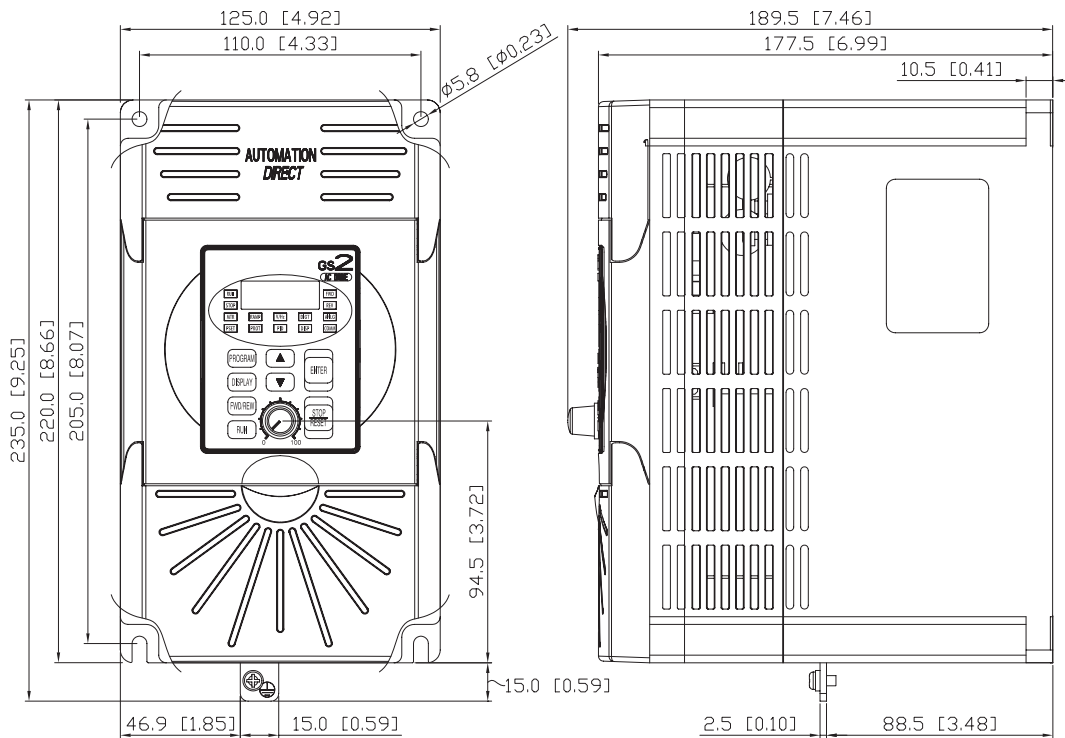



Wiring Solutions


Wiring Solutions using the ZIPLink Wiring System

ZIPLinks eliminate the normally tedious process of wiring between devices by utilizing prewired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end or terminating wires at only one end. Prewired cables keep installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks. There are several wiring solutions available when using the ZIPLink System ranging from PLC I/O-to-ZIPLink Connector Modules that are ready for field

termination, options for connecting to third party devices, GS, DuraPulse and SureServo Drives, and specialty relay, transorb and communications modules. Pre-printed I/O-specific adhesive label strips for quick marking of ZIPLink modules are provided with ZIPLink cables. See the following solutions to help determine the best ZIPLink system for your application.

Solution 1: DirectLOGIC, CLICK and Productivity I/O Modules to ZIPLink Connector Modules

When looking for quick and easy I/O-to-field termination, a ZIPLink connector module used in conjunction with a prewired ZIPLink cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.

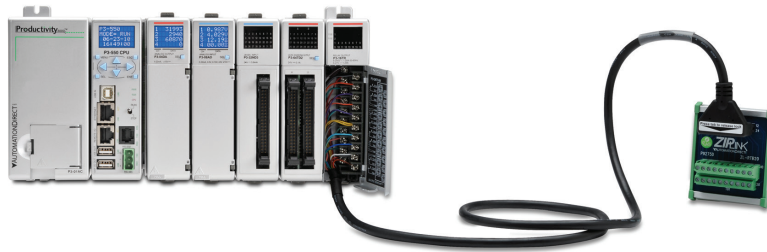

Using the PLC I/O Modules to ZIPLink Connector Modules selector tables located in this section,

1. Locate your I/O module/PLC.
2. Select a **ZIPLink** Module.
3. Select a corresponding **ZIPLink** Cable.

Solution 2: DirectLOGIC, CLICK and Productivity I/O Modules to 3rd Party Devices

When wanting to connect I/O to another device within close proximity of the I/O modules, no extra terminal blocks are necessary when using the ZIPLink Pigtail Cables. ZIPLink Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.



Using the I/O Modules to 3rd Party Devices selector tables located in this section,

1. Locate your PLC I/O module.
2. Select a **ZIPLink** Pigtail Cable that is compatible with your 3rd party device.

Solution 3: GS Series and DURAPULSE Drives Communication Cables

Need to communicate via Modbus RTU to a drive or a network of drives?

ZIPLink cables are available in a wide range of configurations for connecting to PLCs and SureServo, SureStep, Stellar Soft Starter and AC drives. Add a ZIPLink communications module to quickly and easily set up a multi-device network.

Using the Drives Communication selector tables located in this section,

1. Locate your Drive and type of communications.
2. Select a **ZIPLink** cable and other associated hardware.





Wiring Solutions

Solution 4: Serial Communications Cables

ZIPLink offers communications cables for use with DirectLOGIC, CLICK, and Productivity CPUs, that can also be used with other communications devices. Connections include a 6-pin RJ12 or 9-pin, 15-pin and 25-pin D-sub connectors which can be used in conjunction with the RJ12 or D-Sub Feedthrough modules.

Using the Serial Communications Cables selector table located in this section,

- 1. Locate your connector type
- 2. Select a cable.



Solution 5: Specialty ZIPLink Modules

For additional application solutions, ZIPLink modules are available in a variety of configurations including stand-alone relays, 24VDC and 120VAC transorb modules, D-sub and RJ12 feedthrough modules, communication port adapter and distribution modules, and SureServo 50-pin I/O interface connection.

Using the ZIPLink Specialty Modules selector table located in this section,

- 1. Locate the type of application.
- 2. Select a ZIPLink module.




Solution 6: ZIPLink Connector Modules to 3rd Party Devices

If you need a way to connect your device to terminal blocks without all that wiring time, then our pigtail cables with color-coded soldered-tip wires are a good solution. Used in conjunction with any compatible ZIPLink Connector Modules, a pigtail cable keeps wiring clean and easy and reduces troubleshooting time.

Using the Universal Connector Modules and Pigtail Cables table located in this section,

- 1. Select module type.
- 2. Select the number of pins.
- 3. Select cable.

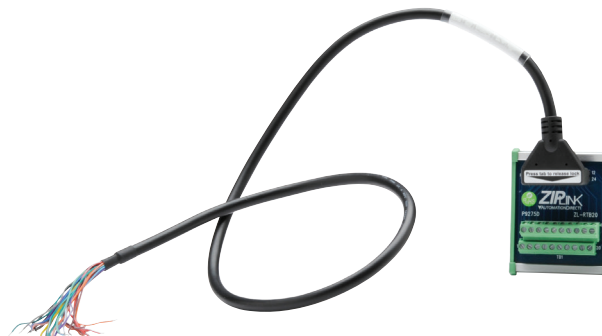



Motor Controller Communication

AC Drive / Motor Controller (GS/DuraPulse) ZIPLink Selector									
AC Drive / Controller		Communications			ZIPLink Cable				
Controller	Comm Port Type	Network/Protocol	Connects to	Comm Port Type	Cable (2 meter length)	Cable Connectors	Other Hardware Required		
GS1	RJ12	RS-485 Modbus RTU	BRX MPUs	RS-485, 3-Pin	ZL-RJ12-CBL-2P	RJ12 to pigtail	N/A		
			P1 CPUs	RS-485					
			P2 CPUs						
			P3 CPUs						
			P2-SCM	RS-485, 4-Pin					
			P3-SCM						
			DL06 PLCs	Port 2 (HD15)	GS-485HD15-CBL-2	RJ12 to HD15			
			D2-260, D2-262 CPU	RJ12	GS-EDRV-CBL-2	RJ12 to RJ12			
			GS-EDRV100						
			ZL-CDM-RJ12Xxx *	RJ12	GS-485RJ12-CBL-2	RJ12 to RJ12			
FA-ISOCOCON	5-pin connector	GS-ISOCOCON-CBL-2	RJ12 to 5-pin plug						
GS2	RJ12	RS-232 Modbus RTU	BRX MPUs	RS-232/485, 3-Pin	ZL-RJ12-CBL-2P	RJ12 to pigtail	N/A		
			P1 CPUs	RS-485					
			P2 CPUs						
			P3 CPUs						
			P2-SCM	Ports 1, 2 & 3					
			P3-SCM	Ports 1 to 4					
			CLICK PLCs	Port 2 (RJ12)	GS-RJ12-CBL-2	RJ12 to RJ12			
			DL05 PLCs						
			DL06 PLCs	Port 2 (HD15)	GS-RJ12-CBL-2	RJ12 to RJ12			
			D2-250-1 CPU						
		D2-260, D2-262 CPU	Port 3 (25-pin)	GS-RJ12-CBL-2	RJ12 to RJ12				
		D4-450, D4-454 CPU							
		RS-485 Modbus RTU			BRX MPUs	RS-232/485, 3-Pin	ZL-RJ12-CBL-2P	RJ12 to pigtail	N/A
					P1 CPUs	RS-485			
					P2 CPUs				
					P3 CPUs				
					P2-SCM	RS-485, 4-Pin			
					P3-SCM				
					DL06 PLCs	Port 2 (HD15)	GS-485HD15-CBL-2	RJ12 to HD15	
					D2-260, D2-262 CPU	RJ12	GS-EDRV-CBL-2	RJ12 to RJ12	
GS-EDRV100									
ZL-CDM-RJ12Xxx *	RJ12				GS-485RJ12-CBL-2	RJ12 to RJ12			
FA-ISOCOCON	5-pin connector	GS-ISOCOCON-CBL-2	RJ12 to 5-pin plug						
DuraPulse (GS3)	RJ12	RS-485 Modbus RTU	BRX MPUs	RS-485, 3-Pin	ZL-RJ12-CBL-2P	RJ12 to pigtail	N/A		
			P1 CPUs	RS-485					
			P2 CPUs						
			P3 CPUs						
			P2-SCM	RS-485, 4-Pin					
			P3-SCM						
			DL06 PLCs	Port 2 (HD15)	GS-485HD15-CBL-2	RJ12 to HD15			
			D2-260, D2-262 CPU	RJ12	GS-EDRV-CBL-2	RJ12 to RJ12			
			GS-EDRV100						
			ZL-CDM-RJ12Xxx *	RJ12	GS-485RJ12-CBL-2	RJ12 to RJ12			
FA-ISOCOCON	5-pin Connector	GS-ISOCOCON-CBL-2	RJ12 to 5-pin plug						

* When using the ZL-CDM-RJ12Xxx ZIPLink Communication Distribution Module, replace the lowercase xx with the number of RJ12 ports, i.e. 4 for four ports or 10 for ten ports. (ex: ZL-CDM-RJ12X4 or ZL-CDM-RJ12X10)