



PF50 Conveyors 1920mm ECU & Prep Table (Global)



» Specifications

- » 120 watt IP66 protected CE marked Brushless DC Gearmotor
- » 1.5 meters/sec [300 FPM] preset speed
- » 70 dB_A at 600mm sound level in free field environment at preset speed
- » Set to run drive-pushing
- » Full speed range from .04 to 2 meters/sec
- » Weight: 73 lbs.


» Part Numbers

P F 5 0 C - 2 5 0 - 1 9 2 0 - U V K

QC Specification Number	Width	Overall Length
----------------------------	-------	-------------------

Requires 1 Control Panel per conveyor (Part #310107-EPANEL-230-1; see specification sheet for more information)

» Drawings

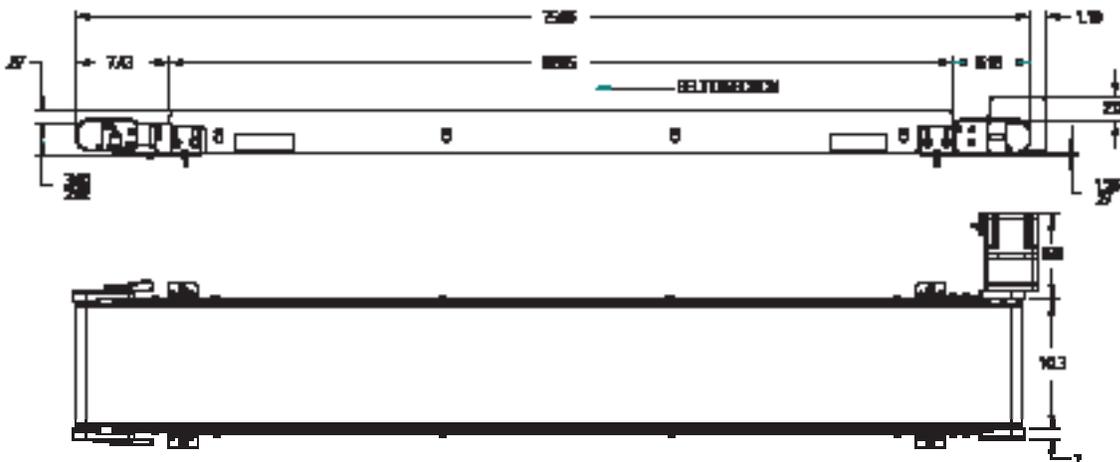

» Features & Benefits

- » Stainless steel construction to operate wet or dry
- » Toolless flip-up tail relieves belt tension quickly
- » Solid lubricated stainless steel bearings with covers ensure long life and protection from contaminants
- » Low profile with adjustable mounts allows clearance under the conveyor and precise transfers
- » V-Guided Belt with sealed edges
- » Positive tracking ensure the belt runs true
- » Precise tension adjustment is hidden during normal operation allowing for precise tuning for quiet operation
- » Direct drive gearmotor saves space and has fewer moving parts than a coupled or underslung design
- » Clear, hand removable side rails and open side frame for easy cleaning
- » Sensors disable conveyors when side rails are removed

