




PF51 Conveyors ECU & Prep Table

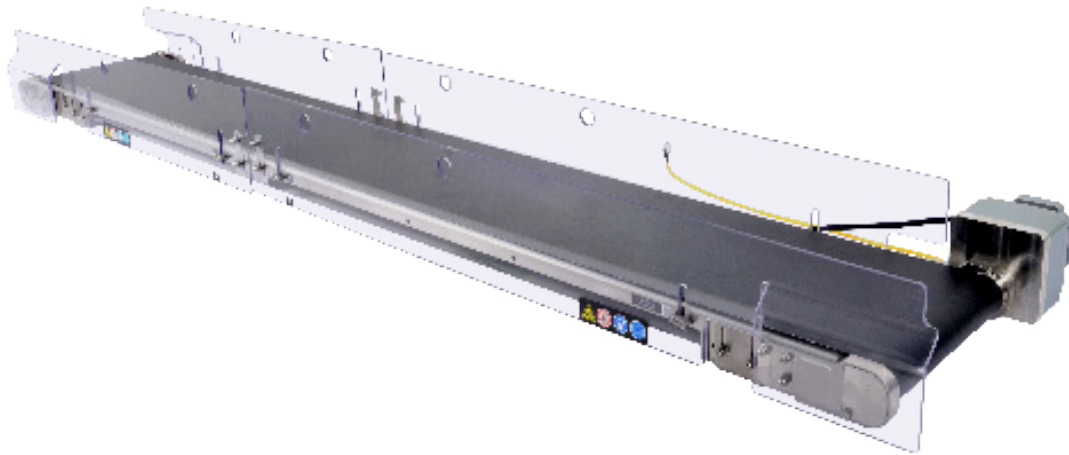

» Specifications

- » 200 watt IP66 protected CE marked Brushless DC Gearmotor
- » Full speed range from .04 to 2 meters/sec [5 – 396 FPM]
- » 70 dBA at 600mm sound level in free field environment
- » Set to run drive-pushing
- » Weight: 73 lbs.

» Part Numbers

P F 5 1 C - 2 5 0 - L L L L - U V K - A A A

QC Specification Number	Width	Overall Length (mm)	Application Identifier
----------------------------	-------	------------------------	---------------------------

» Features & Benefits

- » Clear, hand removable side rails and open side frame for easy cleaning
- » Sensors disable conveyors when side rails are removed
- » Stainless steel construction to operate wet or dry
- » Toolless flip-up tail relieves belt tension quickly
- » Sealed stainless steel ball bearings with covers ensure long life and protection from contaminants
- » Low profile with adjustable mounts allows clearance under the conveyor and precise transfers
- » V-Guided Belt provides stable guide for belt position after maintenance or cleaning
- » Precise tension adjustment is hidden during normal operation allowing for precise tuning for quiet operation
- » Direct drive gearmotor saves space and has fewer moving parts than a coupled or underslung design

» Drawings

